





PRO-SERIES

Products Professionals Can Trust

WALL LIGHTS – UP/DOWN OR DOWN

1. Patent owned design, fashionable and beautiful appearance, adopt unique body structure, increase 120% heat dissipation square, that fully ensure the stability and long lifespan of LED.
2. All new sealing way make the light has better waterproof performance, can meet the various occasions demands for outdoor projects.
3. The light body adopts high pressure aluminum alloy molding, surface with electrostatic plastic coating, lampshade adopts high strength toughened glass, resist the impact and friction.
4. Adopt American CREE original LED light source, high flux output, excellent intensity of light color.

1. Patent owned design, fashionable and beautiful appearance, adopt unique body structure, increase 120% heat dissipation square, that fully ensure the stability and long lifespan of LED.
2. All new sealing way make the light has better waterproof performance, can meet the various occasions demands for outdoor projects.
3. The light body adopts high pressure aluminum alloy molding, surface with electrostatic plastic coating, lampshade adopts high strength toughened glass, resist the impact and friction.
4. Adopt American CREE original LED light source, high flux output, excellent intensity of light color.



技术参数 Specification


产品型号 Product Code	SL6122C-6	SL6122A-6
发光方向 Light direction	up and down	up and down
LED品牌 LED Brand	CREE	CREE
LED数量 LED Quantity	6Pcs	6Pcs
额定功率 Rated Power	16W	8W
输入电压 Input Voltage	AC100-240V	AC100-240V
频率 Frequency Range	50/60HZ	50/60HZ
颜色 Color	Single	Single
发光角度 Beam Model	5° 12.5° 20° 30° 45°	
控制方式 Control Mode	CC	CC
使用寿命 Life	50000H	50000H
防护等级 Protection Grade	IP66	IP66
环境温度 Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%

技术参数 Specification

产品型号 Product Code	SL6155B-18	SL6155A-18
发光方向 Light direction	up and down	up and down
LED品牌 LED Brand	CREE	CREE
LED数量 LED Quantity	18Pcs	9Pcs
额定功率 Rated Power	36W	21W
输入电压 Input Voltage	AC100-240V	AC100-240V
频率 Frequency Range	50/60HZ	50/60HZ
颜色 Color	Single	Single
发光角度 Beam Angle	5° 12.5° 20° 30° 45°	
控制方式 Control Model	CC	CC
使用寿命 Life	50000H	50000H
防护等级 Protection Grade	IP66	IP66
环境温度 Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

SL6122A-6

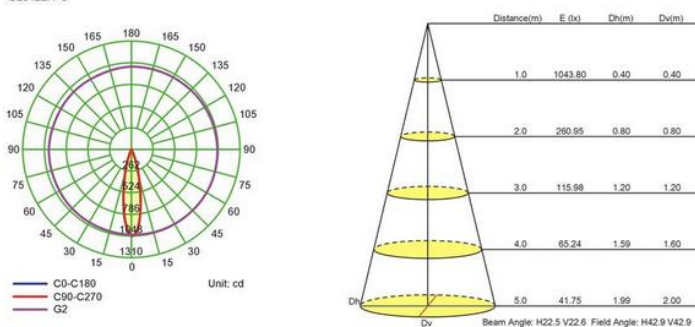

配光曲线 (全角) Distribution Curve Flux (SBC Case)

SL6155A-18

