




FEATURES

- Dual Power.
- 3-CCT changeable.
- High protection rated, IP54 and IK10.
- Super high lumenoutput, up to 130+lm/W.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee.

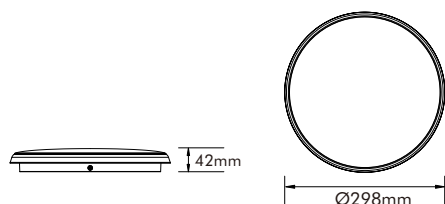

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC85V/260mA(Max), DC83.5V/195mA(Min)
Power	25W(Max), 18W(Min)
Rated Input Current	0.125A(Max), 0.09A(Min)
PF value	>0.9
THD	<25%
Protection Rated	IP54 IK10
Operating Temperature	-10-40°C
Dimmability	Triac dimmable with DIMMATE driver

Optical Data

LED Brand	Hongli SMD LED
CRI	Ra > 80
Colour temperature	3000K-4000K-5000K
System luminous efficacy up to	127lm/W

Packaging

Box Dimensions	L303 x W48 x H306mm
Box Net Weight	0.839Kg
Box Gross Weight	0.976Kg
Carton Dimensions	L495 x W320 x H330 mm/10 PCS
Carton Net Weight	8.39Kg
Carton Gross Weight	10.32Kg



CCT	Beam Angle		Lumen (25W)	Efficacy (25W)		Lumen (18W)	Efficacy (18W)
3000K	120°	CRI 80+	2736lm	110lm/W	CRI 80+	2095lm	116lm/W
4000K	120°		3061lm	127lm/W		2236lm	127lm/W
5000K	120°		2838lm	115lm/W		2152lm	121lm/W