


Black
White
Satin Chrome

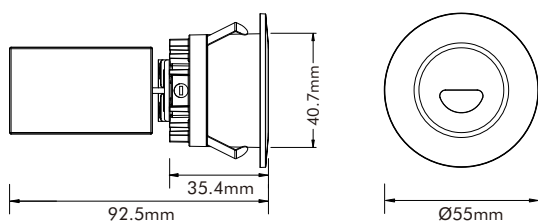

Cut-out: Ø45mm

FEATURES

- Made of die-casting.
- Powder coating finish from AkzoNobel.
- Interchangeable faceplate with magnetic design.
- High density COB with uniform lighting distribution.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee.

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC33V/60mA
Power	3W
Rated Input Current	0.015A
THD	<30%
PF value	>0.82
Ingress Protection	IP54
Operating Temperature	-10-40°C
Dimmability	Triac dimmable with DIMMATE driver

Optical Data

LED Brand	Bridgelux COB LED
CRI	Ra > 80, Ra > 90
Colour temperatures	2700K/3000K/4000K
System luminous efficacy up to	12lm/W

Packaging

Box Dimensions	L65 x W65 x H110mm
Box Net Weight	0.108Kg
Box Gross Weight	0.133Kg
Carton Dimensions	L340 x W340 x H240 mm/50 PCS
Carton Net Weight	5.400Kg
Carton Gross Weight	7.320Kg



RoHS   

Model	CCT		Asymmetric Beam Angle	Lumen	Efficacy
PRO-ST2000	2700K	CRI 80+	25°	32lm	11lm/W
PRO-ST2000	3000K		25°	35lm	12lm/W
PRO-ST2000	4000K		25°	38lm	11lm/W

Model	CCT		Asymmetric Beam Angle	Lumen	Efficacy
PRO-ST2000	2700K	CRI 90+	25°	28lm	9lm/W
PRO-ST2000	3000K		25°	32lm	11lm/W
PRO-ST2000	4000K		25°	34lm	10lm/W